

Union Bonnet Valves VU6




Union Bonnet Valves VU6

CONTENTS

Features	162	How To Order	163
Materials of Construction	162	Ordering information & Dimensions	164
Application	163	Stem Types	166
Cleaning	163	Panel Mounting Procedure	166
Testing	163	Pressure-Temperature Rating	166

Features

- Pressure rating up to 6000psig (413bar) @38°C (100°F)
- Temperature rating from -53°C(-65°F) to 232°C (450°F) with standard PTFE packing, up to 648°C (1200°F) with Grafoil packing
- Roll threaded and hardened stem for long cycle life
- Union bonnet design to ensure high integrity seal under severe environments
- Panel mounting without packing disruption

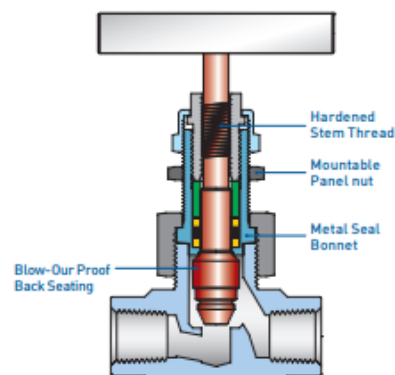

Materials of Construction

No.	Description	Materials	
	Body Material	316SS	Alloy 400
1	Body	316SS	Alloy 400
2	Stem	316SS	Alloy R-405/B164
3	Bonnet	316SS	Alloy R-405/B164
4	Packing Support	Glass-filled PTFE	
5	Packing	PTFE	
6	Gland	316SS	Alloy R-405/B164
7	Packing Bolt	316SS	Alloy R-405/B164
8	Panel Nut	316SS	Alloy R-405/B164
9	Union Nut	316SS	Alloy R-405/B164
10	Lock Nut	316SS	Alloy R-405/B164
11	Set Screw	304SS	
12	Handle	304SS	

Application

Severe service application, high pressure sampling and shut-down systems, test stands

Sour Environment Services

UNILOK valves are comply with NACE MR-0175/ISO 15156 for sour oilfield application or NACE MR-0103 for petroleum refining operations. To order, add-N to the end of part number.

Cleaning

UNILOK valves are free from machine oils, loose particles and grease throughout the close cleaning process.

How To Order

UNILOK VU6 series union bonnet valves are ordered by part number as shown below.

Testing

Every valve is 100% factory tested with air and nitrogen at 1000psig(69bar) for leakage at the seat and packing. Each test is performed to a maximum allowable leak rate of 0.1scc/min.

Important Notification

Proper installation, materials compatibility, operation and maintenance of these valves are the responsibility of the user. The total system design must be taken into consideration to ensure optimal performance and safety. The packing adjustment may be required during the valve's service life.

Example: The following part number, **VU62F-04N-SS** is designated for VU6 series union bonnet valve with 1/4" female NPT to 1/4" female NPT, 316SS.

V	U62	F	- 04N	- SS	-	-
UNILOK Valve	Valve Type	Connection Type	Connection Size	Body Materials	Stem Type	Packing Materials


Valve Type	
U6	Straight Pattern
U6A	Angle Pattern

Connection Type	
U	UNILOK Tube Fitting
F	Female NPT or ISO7/1(P)
M	Male NPT or ISO7/1(P)
WS-	Socket Weld -Tube
WS-	Socket Weld - Pipe

Connection Size	
Fractional(Inch) Tube O.D. Designation	
Tube	inch
1/8	1/4
3/8	1/2
1	3/4
1 1/2	2
2	2 1/2
3	3 1/2
4	4 1/2
6	6
8	8
10	10
12	12
14	14
16	16
18	18
20	20
22	22
24	24
26	26
28	28
30	30
32	32
34	34
36	36
38	38
40	40
42	42
44	44
46	46
48	48
50	50
52	52
54	54
56	56
58	58
60	60
62	62
64	64
66	66
68	68
70	70
72	72
74	74
76	76
78	78
80	80
82	82
84	84
86	86
88	88
90	90
92	92
94	94
96	96
98	98
100	100
102	102
104	104
106	106
108	108
110	110
112	112
114	114
116	116
118	118
120	120
122	122
124	124
126	126
128	128
130	130
132	132
134	134
136	136
138	138
140	140
142	142
144	144
146	146
148	148
150	150
152	152
154	154
156	156
158	158
160	160
162	162
164	164
166	166
168	168
170	170
172	172
174	174
176	176
178	178
180	180
182	182
184	184
186	186
188	188
190	190
192	192
194	194
196	196
198	198
200	200
202	202
204	204
206	206
208	208
210	210
212	212
214	214
216	216
218	218
220	220
222	222
224	224
226	226
228	228
230	230
232	232
234	234
236	236
238	238
240	240
242	242
244	244
246	246
248	248
250	250
252	252
254	254
256	256
258	258
260	260
262	262
264	264
266	266
268	268
270	270
272	272
274	274
276	276
278	278
280	280
282	282
284	284
286	286
288	288
290	290
292	292
294	294
296	296
298	298
300	300
302	302
304	304
306	306
308	308
310	310
312	312
314	314
316	316
318	318
320	320
322	322
324	324
326	326
328	328
330	330
332	332
334	334
336	336
338	338
340	340
342	342
344	344
346	346
348	348
350	350
352	352
354	354
356	356
358	358
360	360
362	362
364	364
366	366
368	368
370	370
372	372
374	374
376	376
378	378
380	380
382	382
384	384
386	386
388	388
390	390
392	392
394	394
396	396
398	398
400	400
402	402
404	404
406	406
408	408
410	410
412	412
414	414
416	416
418	418
420	420
422	422
424	424
426	426
428	428
430	430
432	432
434	434
436	436
438	438
440	440
442	442
444	444
446	446
448	448
450	450
452	452
454	454
456	456
458	458
460	460
462	462
464	464
466	466
468	468
470	470
472	472
474	474
476	476
478	478
480	480
482	482
484	484
486	486
488	488
490	490
492	492
494	494
496	496
498	498
500	500
502	502
504	504
506	506
508	508
510	510
512	512
514	514
516	516
518	518
520	520
522	522
524	524
526	526
528	528
530	530
532	532
534	534
536	536
538	538
540	540
542	542
544	544
546	546
548	548
550	550
552	552
554	554
556	556
558	558
560	560
562	562
564	564
566	566
568	568
570	570
572	572
574	574
576	576
578	578
580	580
582	582
584	584
586	586
588	588
590	590
592	592
594	594
596	596
598	598
600	600
602	602
604	604
606	606
608	608
610	610
612	612
614	614
616	616
618	618
620	620
622	622
624	624
626	626
628	628
630	630
632	632
634	634
636	636
638	638
640	640
642	642
644	644
646	646
648	648
650	650
652	652
654	654
656	656
658	658
660	660
662	662
664	664
666	666
668	668
670	670
672	672
674	674
676	676
678	678
680	680
682	682
684	684
686	686
688	688
690	690
692	692
694	694
696	696
698	698
700	700
702	702
704	704
706	706
708	708
710	710
712	712
714	714
716	716
718	718
720	720
722	722
724	724
726	726
728	728
730	730
732	732
734	734
736	736
738	738
740	740
742	742
744	744
746	746
748	748
750	750
752	752
754	754
756	756
758	758
760	760
762	762
764	764
766	766
768	768
770	770
772	772
774	774
776	776
778	778
780	780
782	782
784	784
786	786
788	788
790	790
792	792
794	794
796	796
798	798
800	800
802	802
804	804
806	806
808	808
810	810
812	812
814	814
816	816
818	818
820	820
822	822
824	824
826	826
828	828
830	830
832	832
834	834
836	836
838	838
840	840
842	842
844	844
846	846
848	848
850	850
852	852
854	854
856	856
858	858
860	860
862	862
864	864
866	866
868	868
870	870
872	872
874	874
876	876

VU6 series

(Straight or Angle Pattern, Both UNILOK Tube Fittings or Both Tube or Pipe Socket Welds)

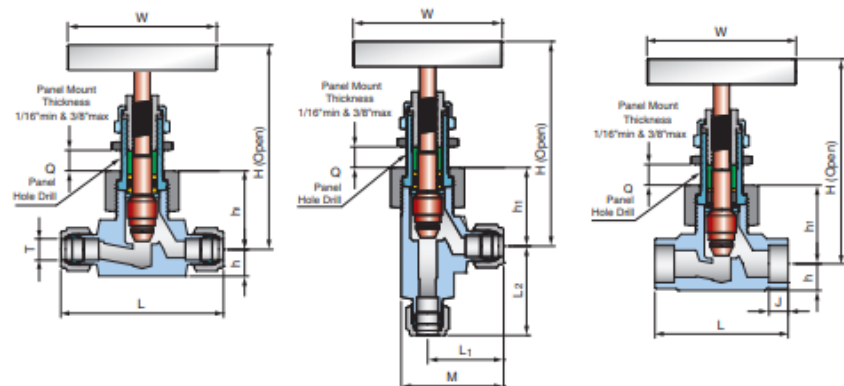


Ordering Information & Dimensions

Part No.	End Connections		Orifice	CV	Dimensions (mm)										
	Inlet	Outlet			L	L ₁	L ₂	M	h	h ₁	h ₂	H (open)	W	Q	J
VU61	U-04T-	1/4" UNILOK	4.0	0.35	61.9	29.4	37.3	38.9	9.6	27.8	27.8	77.8	45.0	15.1	-
	U-M06T-	6mm UNILOK													
	U-M08T-	8mm UNILOK													
VU62	WS-04T	1/4" Tube SW	6.4	0.86	46.0	22.3	30.2	31.8	12.7	34.1	34.2	93.7	64.0	19.9	7.2
	U-06T-	3/8" UNILOK			73.0	32.5	42.9	45.3			31.0				
	U-08T-	1/2" UNILOK			77.8	34.9	42.1	47.6			34.2				
	U-M10T-	10mm UNILOK			73.0	33.3	39.7	46.1			34.2				
	U-M12T-	12mm UNILOK			77.8	35.7	42.1	48.4			34.2				
	WS-06T	3/8" Tube SW			57.2	25.4	28.6	38.1			37.3				8.0
	WS-08T	1/2" Tube SW			57.2	25.4	25.4	38.1			35.7				9.6
VU63	WS-04P	1/4" Pipe SW	11.0	2.20	57.2	25.4	28.6	38.1	15.9	46.0	47.6	121.5	89.0	26.2	
	U-08T-	1/2" UNILOK			98.0	43.7	53.2	61.1			47.6				
	U-12T-	3/4" UNILOK			100.0	-	-	-			-				
	U-16T-	1" UNILOK			98.0	43.7	53.2	61.1			47.6				
	WS-08T	1/2" Tube SW			79.4	33.3	42.9	50.8			47.6				9.6
	WS-12T	3/4" Tube SW			79.4	-	-	-			-				11.1
	WS-08P	1/2" Pipe SW			79.4	33.3	39.7	50.8			50.8				9.6

Dimensions are for reference only and are subject to change without prior notice.

VU6 series

(Straight or Angle Pattern Both Female or Male Threads or Male/Female Thread)

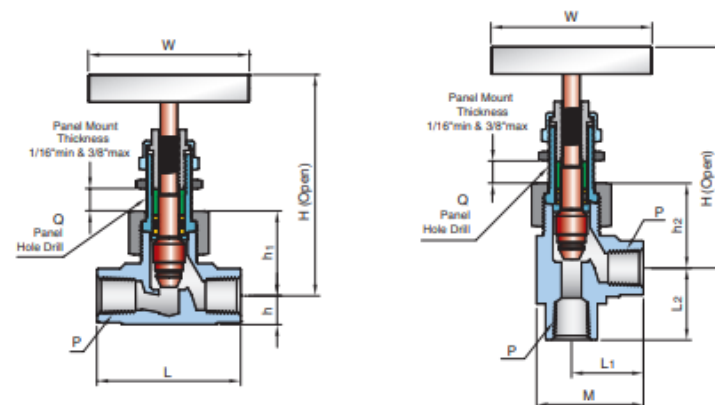

Ordering Information & Dimensions

Part No.	End Connections		Orifice	CV	Dimensions (mm)										
	Inlet	Outlet			L	L ₁	L ₂	M	h	h ₁	h ₂	H (open)	W	Q	
VU61	F-02N-	1/8" Female NPT	4.0	0.35	50.8	23.0	25.4	32.6	9.6	27.8	32.6	77.8	45.0	15.1	
	F-04N-	1/4" Female NPT			52.4	26.2	23.0	32.6							
	M-04N-	1/4" Male NPT			50.8	25.4	25.4	35.0							
	MF-04N-	1/4" Male NPT 1/4" Female NPT			52.4	23.0	25.4	32.6							
VU62	F-04N-	1/4" Female NPT	6.4	0.86	57.2	25.4	28.6	38.1	12.7	34.1	37.3	93.7	64.0	19.9	
	F-06N-	3/8" Female NPT			79.4	33.3	39.7	50.8			46.0				
	F-08N-	1/2" Female NPT			82.6	-	-	-			48.4				
	F-12N-	3/4" Female NPT			92.1	-	-	-			54.0				
VU63	F-16N-	1" Female NPT	11.0	2.20	92.1	-	-	-	25.4	54.0	-	121.5	89.0	26.2	
	MF-08N-	1/2" Male NPT 1/2" Female NPT			79.4	33.3	39.7	50.8			46.0				
	MF-12N-	3/4" Male NPT 3/4" Female NPT			82.6	-	-	-			48.4				
	MF-16N-	1" Male NPT 1" Female NPT			92.1	-	-	-			54.0				

ISO7/1 Tapered Threads (PT) are available for all fractional sizes of VU6 series valves.

Add "R" as a suffix instead of "N".

Dimensions are for reference only and are subject to change without prior notice.

Stem Types

Metal to metal vee stem is standard for pressure tightness even at elevated temperature. Regulating stem, ball stem and soft-seat stem with KEL-F are available as optional. The excessive force when closing valve may damage both seat and stem tip, particularly soft-seat stem.

Vee, regulating, ball and soft-seat are non-rotating stems.



Panel Mounting Procedure



Loose handle set screw using appropriate allen key.

Disassemble Lock nut and panel nut.

Insert the valve into the panel hole.

Tighten panel nut and Lock nut onto the valve bonnet.

Reassemble handle.

Tighten panel nut when fully closing of the valve.

Pressure -Temperature Rating

Body Material	Stem	PTFE packing			
		Temperature Rating		Pressure Rating @ 38°C	
		°C	°F	psig	bar
316SS	Vee, Ball, Regulating	-54~232	-65~450	6000	413
	Soft-seat (Kel-F)	-54~93	-65~200		
Alloy 400	Vee, Ball, Regulating	-54~232	-65~450	5000	345
	Soft-seat (Kel-F)	-54~93	-65~200		

For the service with aromatic heat transfer fluids or concentrated sulfuric and nitric acids, PEEK is not recommended.

Packing Material	Body Material	Temperature Rating		Pressure Rating @ Max. Temperature	
		°C	°F	psig	bar
PTFE	316SS	-54~232	-65~450	4130	285
	Alloy 400	-54~232	-65~450	3970	274
PEEK	316SS	-54~315	-65~600	3760	260
	Alloy 400	-54~260	-65~500	3960	273
Grafoil	316SS	-54~648	-65~1200	1715	119
	Alloy 400	-54~260	-65~500	3960	273

Alloy 400/Monite is not applicable over 260°C(500°F)